


G219 A/V SETUP

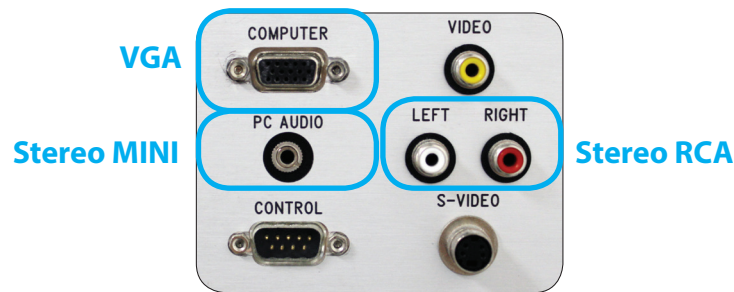


1. Check Cable Connections

- Make sure the Thunderbolt-VGA adapter is firmly attached to the iMac.
- Check to see the VGA cable is attached to the adapter and to the patch box.
- Make sure the stereo mini cable **-OR-** Stereo RCA cable is firmly connected from the computer to the patch box.


Stereo MINI

Stereo RCA

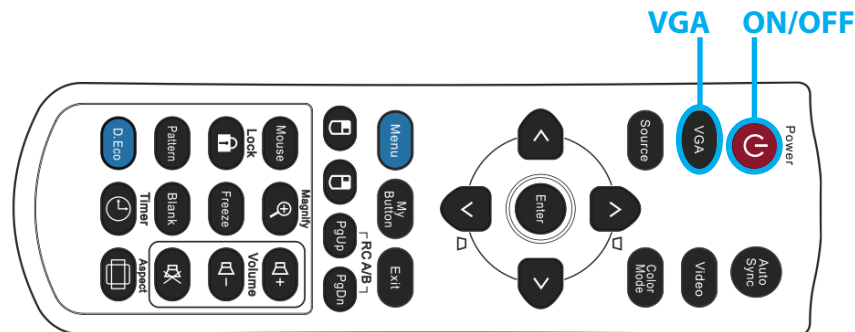

2. Projector Input/Settings

- Turn on the projector using the remote.
- Turn on the iMac.
- Set projector input using the remote to VGA.
- Resolution on iMac should be set to "Best for PJD7820HD". You can set this by going to *System Preferences > Displays*.
- Press the *Arrangement* tab, to turn "Mirror Displays" on or off.

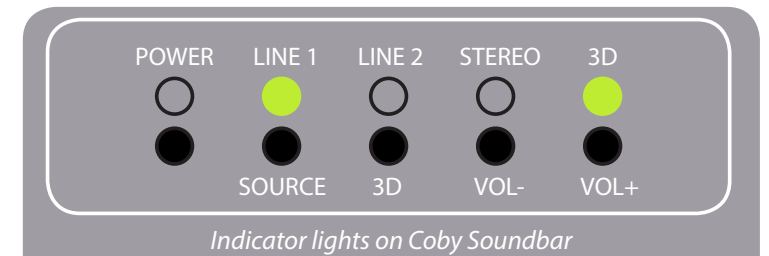

Indicator lights on Coby Soundbar

3. Audio Input/Settings

- Turn up the volume on the computer.
- Turn the speaker on using the speaker remote. **A red power light means speaker is OFF.**
- Press SOURCE until Line 1 is selected.
- Press "3D" for a surround sound effect.

